


Sediment Removal

10 & 20" Standard Housings

Purtrex Depth Filters use Patented blown microfibre technology to meet the market requirements for a pure polypropylene depth filter with exceptional dirt-holding capability, translating to longer life. True graded density captures particles throughout the entire filter depth.

Available in lengths: 9 7/8, 10, 20, 30 & 40"

Ratings: 1, 5, 10, 20, & 50 micron (others available to order).

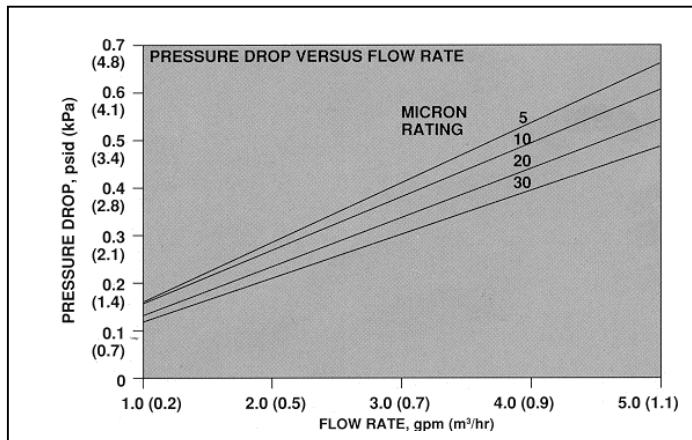

(Flow rates based on 10" Purtrex elements)

10BB & 20BB High Flow Housing

We recommend our WP05 range of wound filter elements for use with the above filter housings. These are manufactured from a durable polypropylene cord that is wound around a rigid polypropylene core. They are an economical solution to reduce fine sediment, including sand, silt, rust and scale particles.

Flow Rates: 10BB: 40 L/M
20BB: 60 L/M



PUMPMASTERS LTD

UNIT 14A NASMYTH COURT
HOUSTON INDUSTRIAL ESTATE
LIVINGSTON, EH54 5EG
SCOTLAND, UK

TEL: 0131 661 3982
FAX: 0131 652 0115